


OVALO LED BULKHEAD

PRAGMALUX
PROFESSIONAL LIGHTING

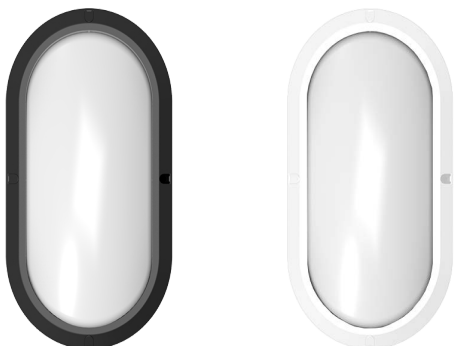

KEY FEATURES

- Minimalist design with an uniform and pleasant diffuse light
- Suitable for indoor and outdoor projects: apartments, porches, entrances, stairs and more
- Ideal for replacing CFL/TL/PL fixtures
- Dimensions Ø270mm x 148mm
- Long lifetime L80B10 100.000h L90B50>50.000h
- IP65/IK08
- UV-Resistant PC body
- Adjustable CCT 2 in 1 (3000-4000K)
- 2 colours available: black and white, and 2 extra ring options (grill and eye-lid)
- Daylight sensor and Motion sensor versions available

IP65 IK08



90LM/W



5 PRAGMALUX
YEAR
WARRANTY

DETAILS



OPTIONS



ACCESSORIES



Grill White
1000527



Grill Black
1000534



Eye-Lid White
1000503



Eye-Lid Black
1000510

SPECIFICATIONS

ITEM CODE	DESCRIPTION	W	LM	LM/W	KELVIN	CRI	LIFETIME L80
1000893	LED Bulkhead Ovalo IP65 5W 3000K-4000K 2-CCT 450lm White Ø245x97mm	5	450	90	3000/4000	≥80	100000
1000893-S	LED Bulkhead Ovalo IP65 5W 3000K-4000K 2-CCT 450lm White Ø245x97mm + Motion sensor	5	450	90	3000/4000	≥80	100000
1000893-DS	LED Bulkhead Ovalo IP65 5W 3000K-4000K 2-CCT 450lm White Ø245x97mm + Daylight sensor	5	450	90	3000/4000	≥80	100000
1000909	LED Bulkhead Ovalo IP65 5W 3000K-4000K 2-CCT 450lm Black Ø245x97mm	5	450	90	3000/4000	≥80	100000
1000909-S	LED Bulkhead Ovalo IP65 5W 3000K-4000K 2-CCT 450lm Black Ø245x97mm + Motion sensor	5	450	90	3000/4000	≥80	100000
1000909-DS	LED Bulkhead Ovalo IP65 5W 3000K-4000K 2-CCT 450lm Black Ø245x97mm + Daylight sensor	5	450	90	3000/4000	≥80	100000

TECHNICAL DATA

ELECTRICAL DATA	
Voltage (V)	220-240
Frequency (Hz)	50/60
Power factor (λ)	≥0.7
	≥0.5 (sensor version)
Operating mode	Integrated LED Driver
Total harmonic distortion	≤ 20 %

TEMPERATURES & OPERATING CONDITIONS

Ambient temperature	25°C
Operating temperature	-20°C +40°C

COLORS & MATERIALS

Color (Housing)	White Black
Material (Housing)	PC
Material (Reflector)	PC

CERTIFICATES & STANDARDS

Driver certificates	CE
Fixture certificates	CE
Ingress protection	IP65
Protection class	II
Protection class IK	08
IEC	EN IEC 62722-2-1
LM80 (TM21 /) L90B50 (hours)	>50,000

CAPABILITIES

Dimmable	No
Type of connection	Terminal, 2-pole
LED Module replacable	No

PRAGMALUX


All rights reserved. Pragmalux - PDL Lighting Group B.V. retains the right to modify product specifications without any prior notice or obligation and does not assume any liability for any consequences of using this document. Subject to errors and printing errors. Luminous flux tolerance: +/- 10%. Power consumption tolerance: +/- 10%.

Version: June 2021

Page 1/2

OVALO LED BULKHEAD

DIMENSIONS

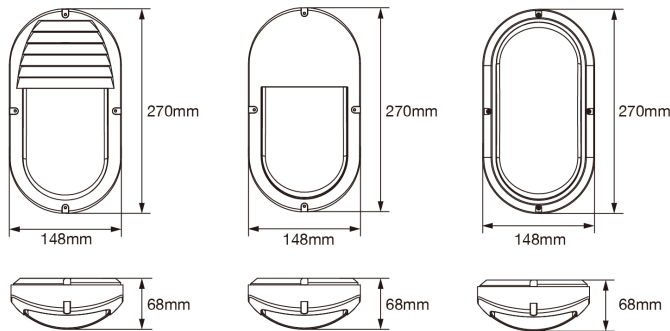

PHOTOMETRIC SPECIFICATIONS

LED BULKHEAD OVALO 5W 4000K

